



LINE Series

Piston
compressor
range



Air. Anytime. Anywhere.




LINE Series

Direct drive & Belt drive piston compressors

ABAC direct drive units offer a user friendly, reliable and compact design.

ABAC belt driven units are now equipped with the new and efficient slower running pump, giving noticeable noise reductions and much lower running temperatures. The new belt guard design improves cooling air flow over the pump, further increasing reliability.

Applications

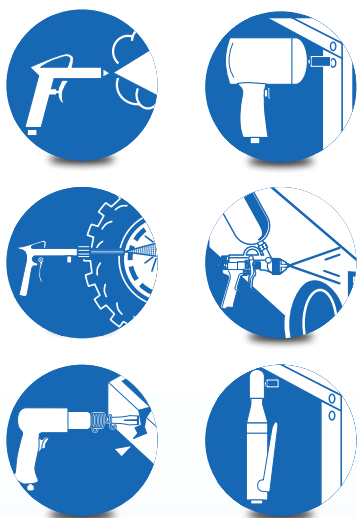

Efficiency

Unique design belt guard with a **more efficient** air flow over the pump, designed to **improve cooling**

Reliability

Highly reliable thanks to our **new pump** running at a much **lower speed** reducing wear

User friendly

Significantly **lower noise levels** due to **slower running**

Blue Cap

Signature of the new and **unique ABAC pump**



Direct Drive	Part Number	Tank	Pump	l/min	CFM	HP	kW	rpm	Volt	Bar	L x W x H (mm)	Kg
COMPY O15	1129100215	-	Oil Free	180	6.4	1.5	1.1	2450	230/1/50	8	390 x 270 x 240	4
START O15	1129100201	6L	Oil Free	180	6.4	1.5	1.1	2450	230/1/50	8	310 x 385 x 290	10
POLE POSITION O15	1129100203	24L	Oil Free	180	6.4	1.5	1.1	2450	230/1/50	8	600 x 325 x 500	16
START L20	1129100226	6L	Lubricated	220	7.8	2	1.5	2850	230/1/50	8	370 x 285 x 480	14
POLE POSITION L20	1129100202	24L	Lubricated	220	7.8	2	1.5	2850	230/1/50	8	600 x 325 x 605	25
MONTECARLO L20	4116023498	50L	Lubricated	220	7.8	2	1.5	2850	230/1/50	8	760 x 420 x 665	33

Belt Drive	Part Number	Tank	Air Displacement		Free Air Delivered		Noise		Motor				L x W x H (mm)	Kg
			l/min	CFM	l/min	CFM	dB(A)	Lw(A)	HP	kW	rpm	Volt		
A29 27 CM2	4116024559	27L	255	8.9	175	6.2	73	93	2	1.5	1075	230/1/50	810 x 390 x 710	43
A29 50 CM2	4116024558	50L	255	8.9	175	6.2	73	93	2	1.5	1075	230/1/50	940 x 370 x 780	49
A29 90 CM2	4116024555	90L	255	8.9	175	6.2	73	93	2	1.5	1075	230/1/50	1010 x 415 x 900	56
A29 150 CM2	4116024554	150L	255	8.9	175	6.2	73	93	2	1.5	1075	230/1/50	1375 x 420 x 950	87
A29B 50 CM3	4116024869	50L	320	11.2	230	7.9	75	95	3	2.2	1300	230/1/50	940 x 410 x 800	58
A29B 90 CM3	4116024870	90L	320	11.2	230	7.9	75	95	3	2.2	1300	230/1/50	1010 x 415 x 900	56
A29B 90 FT3	4116024526	90L	320	11.2	230	7.9	75	95	3	2.2	1300	400/3/50	1010 x 415 x 900	56
A29B 150 FM3	4116024871	150L	320	11.2	230	7.9	75	95	3	2.2	1300	230/1/50	1375 x 420 x 950	87
A29B 150 FT3	4116024533	150L	320	11.2	230	7.9	75	95	3	2.2	1300	400/3/50	1375 x 420 x 950	87
A29B 200 FM3	4116024888	200L	320	11.2	230	7.9	75	95	3	2.2	1300	230/1/50	1500 x 470 x 1110	91

* All belt drive models shown are 10 Bar maximum pressure Model Description :- C = Receiver on Wheels, F = Receiver is Floor Mounted